




# Clean Room™ *ClimaPlus*™

Fine textured panel, Class 100



Fine textured panel, Class 10M-100M

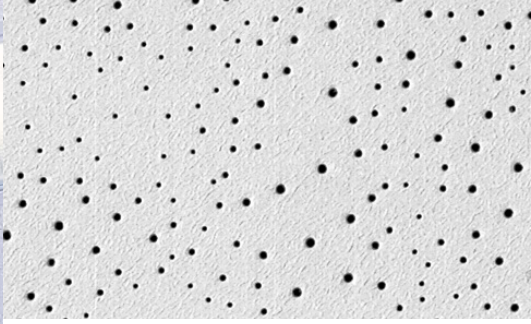

## Features and Benefits

- CLEAN ROOM™ *CLIMAPLUS*™ Class 100 and 10M-100M panels have an embossed, vinyl-laminated face with sealed back and edges for use in Class 100 or 10M-100M clean rooms per Federal Standard 209E, "Clean Room and Work Station Requirements Controlled Environment." SHEETROCK Brand Lay-In Ceiling Panels *CLIMAPLUS*, CLEAN ROOM, have a gypsum core, sealed edges, and vinyl face and back; they meet U. S. Dept. of Agriculture Food Safety Inspection Service requirements for food processing and use in clean room environments up to Class 100.
- FIRECODE™ formulation designed to meet life safety codes.
- *CLIMAPLUS*™ 15-year System Warranty to withstand conditions up to 104 °F (40 °C)/90% relative humidity without visible sag when used with USG's DONN® Brand Suspension Systems.

CLEAN ROOM™ Class 10M-100M Panels with *CLIMAPLUS*™ Performance/DONN® Brand DXLA™ Suspension System

# Clean Room™ ClimaPlus™

Acoustical Ceilings

Technical Service 800 USG.4YOU  
Web Site www.usg.com  
Samples/Literature 888 874.2450  
Samples/Literature Fax 888 874.2348  
Customer Service 800 950.3839  
Literature Number SC1811



UL Classified

	Edge	Panel Size	Class	Item No.	NRC <sup>1</sup>	CAC Min.	LR <sup>2</sup>	Color	Grid Options	Recycled Content <sup>3</sup>	Panel Cost
CLEAN ROOM™ CLIMAPLUS™ Class 100 Panels	(SQ)	2' x2' x5/8"		56099	—	35	.79	White	A, B, C, D, E	51%	\$\$
		2' x4' x5/8"		56091	—	35	.79	White	A, B, C, D, E	51%	\$\$
CLEAN ROOM CLIMAPLUS Class 10M-100M Panels	(SQ)	2' x2' x5/8"		56060	.60	35	.79	White	A, B, C, D, E	51%	\$\$
		2' x4' x5/8"		56090	.60	35	.79	White	A, B, C, D, E	51%	\$\$
SHEETROCK® Brand Lay-In Ceiling Panel CLIMAPLUS, CLEAN ROOM	(SQ)	2' x4' x1/2"		3200	—	40 <sup>4</sup>	.79	White	A, B, C, E	23%	\$
	<b>A</b> DONN® DX®/ DXL™	<b>B</b> DONN DXLA®	<b>C</b> ZXLA™	<b>D</b> AX™	<b>E</b> DONN CE <sup>6</sup>						
<b>Grid Profile Options<sup>5</sup></b>											

#### ASTM E1264 classification

SHEETROCK Brand Lay-in Ceiling Panel, CLEAN ROOM CLIMAPLUS: Type XX, Pattern G  
Class 100: Type X, Pattern GI  
Class 10-100M: Type X, Pattern CGI

#### ASTM E84 surface burning characteristics

SHEETROCK Brand Lay-in Ceiling Panel, CLEAN ROOM CLIMAPLUS:  
Flame spread: 20  
Smoke developed: 5  
Class 100 and Class 10M-100M:  
Flame spread: 25  
Smoke developed: 45

#### Weight

1.11 lb./ft.<sup>2</sup> (CLEAN ROOM panels)  
2.0 lb./ft.<sup>2</sup> (SHEETROCK Brand Lay-in Ceiling Panel, CLEAN ROOM CLIMAPLUS panels)

#### Thermal resistance

R-1.68 for CLEAN ROOM Class 100 and 10M-100M Panels  
R-0.44 for SHEETROCK Brand Lay-In Ceiling Panel.

#### Maximum backloading

See Warranty for details.

#### Maintenance

Can be cleaned easily with a damp sponge, mild detergent and water. Do not use acetate, ammonia, or highly concentrated chlorine, bromide or other harsh chemicals.

#### Humidity resistance

Tested by 48-hour cycles of 90% and 25% relative humidity repeated continuously for 24 days with no delamination.

#### Footnotes

1. NRC rating for SHEETROCK Brand Lay-In Ceiling Panel CLIMAPLUS, CLEAN ROOM and CLEAN ROOM CLIMAPLUS Class 100 is .10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than .50
2. LR values are shown as averages.
3. For details, see the Recycled Content selector.
4. Not UL-Classified for acoustics.

5. Field-cut edges of CLEAN ROOM panels must be sealed with white latex paint, shellac, or a mixture of 50% water and 50% water-soluble glue.
6. Clean-room-rated applications require a suspension system with gasketed tee flanges such as DONN CE.

#### SAFETY FIRST!

Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by  
USG Interiors, Inc.  
125 South Franklin Street  
Chicago, IL 60606

The following are trademarks of USG Interiors, Inc. or a related company: AX, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXL, DXLA, FIRECODE, SHEETROCK, ZXLA, USG.

SC1811/rev. 6-04  
© 2004, USG Interiors, Inc.  
Printed in U.S.A.