



Features and Benefits

- Aluminum panels combine great looks with the strength of metal.
- Precision 1/4" reveal and concealed suspension system give ceilings a monolithic appearance.
- Available in numerous perforation patterns in painted, anodized metals.
- Snap-up installation with downward access is excellent for shallow plenum areas.
- Close tolerances provide exact fit and secure, vibration-free installation with clean intersections.
- Easy installation into USG's standard DONN® Brand FINELINE® Suspension System.
- ACOUSTIBOND™ sound backer produces .65 NRC without additional acoustical material when used with perforated panels within an enclosed plenum. (minimum plenum depth 18")
- Systems up to 30" wide and 78" long windload tested to 120 MPH with proper bracing and exterior framing.


Applications

- Entertainment
- Gaming
- Exterior soffits
- Hospitality
- Transportation terminals


Product Information

Materials	Aluminum panels: Painted or anodized.		
Finishes	Premium metal, anodized, and smooth or perforated panels in Flat White, Silver Satin and custom colors. See Metal Finishes and Metal Perforations selectors for more finish options.		
Typical Sizes¹	2' x 2'	4' x 4' ²	30" x 30"
Plenum Depth	Since panels are installed from below, the clearance for installation and removal of panels is minimal. Additional plenum clearance of up to 9" is required for air boot and lighting installations, depending on the unit selected.		
Grid Layout	The modular nature of CELEBRATION ceilings must be considered when an installation is designed. Main tees and cross tees are exactly on module lines. Panels may be field cut at walls and columns or terminated at a grid module for island installations.		
Acoustics³	Description	Optional Acoustical Material	Sound Rating – NRC
			Perforation A062 Perforation A116
	Perforated panel	ACOUSTIBOND® backer	.65 .70
	Perforated panel	1-1/2", 6 lb. density fiberglass	.90 .95
Perforated panel	2" .75 lb. fiberglass in poly bag	.85 .90	
Air Handling	Air diffusers may be located around the perimeter of the ceiling or laid into the grid in place of CELEBRATION panels. The CELEBRATION diffuser is an extruded aluminum frame with matching faceplate and color-coordinated vanes, in 1-, 2-, 3-, and 4-slot configurations with 4-directional throw.		
Weight	Approximately .53 lbs. per sq. ft., not including lights and air diffusers.		
Code Approval	CELEBRATION panels provide a continuous interlock with the suspension system. Supporting grid is capable of sustaining loads greater than those imposed by the CELEBRATION system when installed in accordance with manufacturer's instructions.		

Perspective

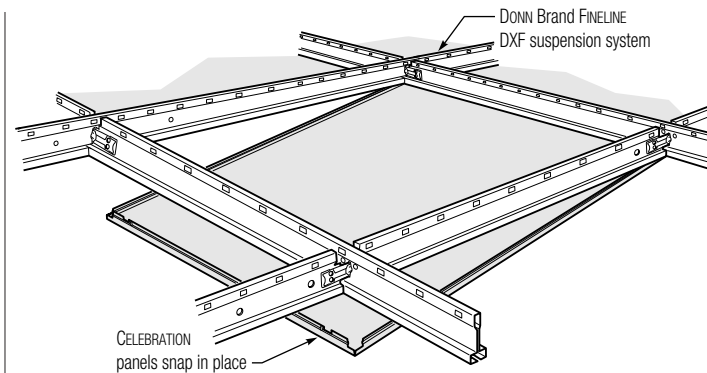

Hinge Down Panel
For easy plenum access and maintenance, CELEBRATION panels hinge down.

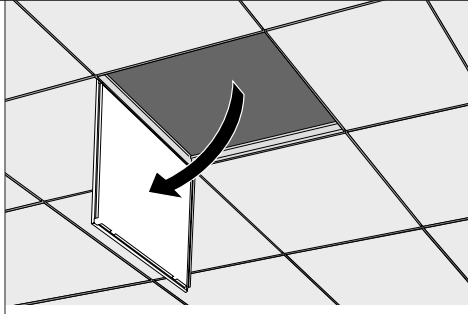

Supporting technical literature
IC03102
Acoustics
These values are for standard A062 perforation pattern.

Recycled content
Contact Technical Services at 800 USG.4YOU.

Footnotes
1. Other sizes available on request.
2. Interior use, painted finishes only.
3. With A062 perforated panel.

SAFETY FIRST!
Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.